

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

10/506840

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number
WO 03/077275 A1(51) International Patent Classification⁷: H01J 31/12(74) Agent: DEGUELLE, Wilhelmus, H., G.; Internationaal
Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eind-
hoven (NL).

(21) International Application Number: PCT/IB03/00707

(22) International Filing Date: 19 February 2003 (19.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02075945.2 11 March 2002 (11.03.2002) EP(71) Applicant (for all designated States except US): KONIN-
KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and


(75) Inventor/Applicant (for US only): VISSENBERG,
Michel, C., J., M. [NL/NL]; c/o Prof. Holstlaan 6,
NL-5656 AA Eindhoven (NL).

Published:

— with international search report

[Continued on next page]

(54) Title: DISPLAY DEVICE

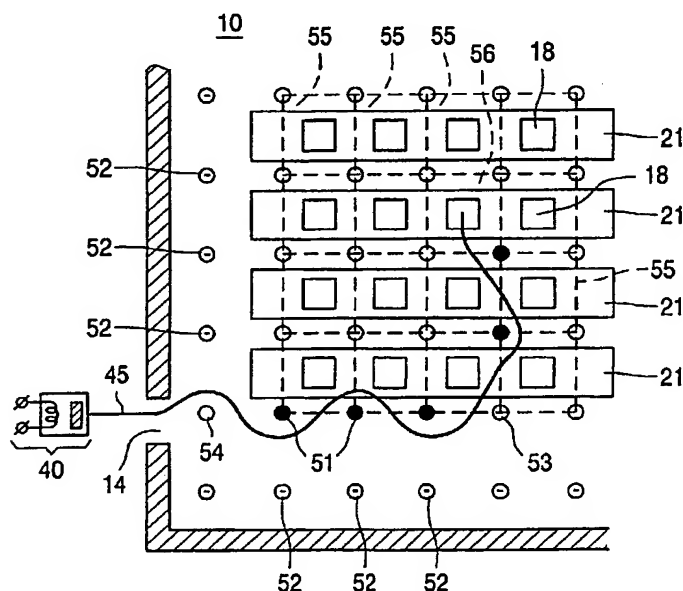

(57) Abstract: A display device is provided with a display screen (30) for displaying image information, having a predetermined number of luminescent picture elements (35). In operation, an electron beam (45) is generated by an electron gun (40) and entered into a two-dimensional slalom guide (10), wherein the beam is guided in two mutually perpendicular directions by means of slalom focusing. Subsequently, the electron beam (45) is extracted from a selected cell (56) of the slalom guide (10) towards a corresponding picture element (35). The path of the electron beam (45) in the slalom guide (10) can be fully customized within the guidance plane. Preferably, the guidance plane extends substantially parallel to the display screen (30).

WO 03/077275 A1